



SELF-CONTAINED WHITE LED EMERGENCY EXIT LIGHT

... The designed is thin and lightweight, lowest power consumption, minimize EMI and specially equipped with a customised proprietary Hybrid IC, super-bright white LED and longer life-span. Easy and fast installation.

Enviroment for Factories, Schools, Stadiums, Banks, Clubs, Hotels, Computer Rooms, Offices, Public Halls, Hospitals, Apartments, Warehouses, Carparks, etc.

TECHNICAL CHARACTERISTICS

INPUT VOLTAGE	: 220 ~ 240Vac 50/60Hz \pm 10%, A: 0.019 Pf: 0.44
BATTERY	: 3.6V 0.9Ah High temp rated Nickel Cadmium cells or others 1.5Ah High temp rated Lithium Iron Phosphate
LAMP USED	: SMT White LED strip > 30,000 hrs
RATED PERIOD	: > 3 hrs or others
MODE	: Maintained
OPERATION TEMPERATURE	: ta 40 °C
POWER CONSUMPTION	: < 2W
CHARGE MONITOR	: Super bright Green LED 5mm \varnothing
RECHARGE PERIOD	: 16 ~ 24 hrs
EMERGENCY LUMINANCE	: > 8 cd/m ²
ELECTROMAGNETIC FIELD	: 17m gauss @ 0.1m
CHARGER	: Hybrid controlled charger
PROTECTION	: Low volt cut-off to prevent battery over discharge Incoming AC fuse and Battery DC fuse Tropical climate protection coating on hybrid control circuit
CONSTRUCTION	: Electrode galvanised sheet steel with epoxy powder coating 20mm \varnothing K/O hole, Fire Retardant Acrylic diffuser
DIMENSION	: 345mm(L) x 52(W) x 252mm(H)
WEIGHT	: 1.30kg (Net) / 1.47kg (Gross) with Bracket
PACKING	: One unit per carton
CARTON / DIMENSION	: Double wall corrugated / 370mm(L) x 60mm(W) x 265mm(H)
COMPLIANCE	: CP19 : 2000, SS263. pART 2, IEC 598-2-22, S364
WARRANTY	: 1 Year
ACCESSORY	: Wall mounting bracket (for single face)

ORDERING INFORMATION

LEGEND	SINGLE FACE MODEL	FRONT LEGEND	BACK LEGEND	DOUBLE FACE MODEL
EXIT	SLED-X2-001	EXIT	EXIT	SLED-X2-002
◀EXIT	SLED-X2-011	◀EXIT	EXIT ▶	SLED-X2-012
EXIT ▶	SLED-X2-021	EXIT ▶	◀EXIT	SLED-X2-022
◀EXIT ▶	SLED-X2-031	◀EXIT ▶	◀EXIT ▶	SLED-X2-032

- (1) Other signs are available upon request
(2) Colours are available upon request
(3) Annual power cost US\$1.20 @ US\$0.20/KW

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.



SLED-X2



HYBRID IC CONTROLLED
SELF-CONTAINED EMERGENCY
LIGHTING SUPER BRIGHT SMT WHITE
LED LUMINAIRE

Suitable for



Wall Mount



Wall Side Mount



Ceiling Recessed
with Extra Panel




Ceiling Mount



Suspension

DIMENSION (mm)

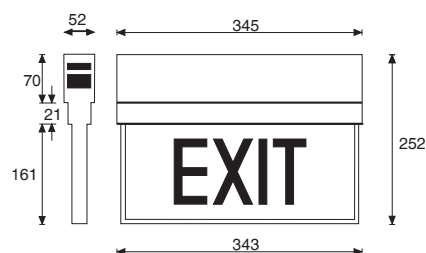

Type and batch tested with
PSB PLUS LISTED LABEL

CLASS 1